CITY OF SAN JOSE
CAPITAL OF SILICON VALLEY

Department of Transportation

WAYNE TANDA - DIRECTOR

15 GALLON TREE PLANTING DETAIL FOR HOMEOWNERS

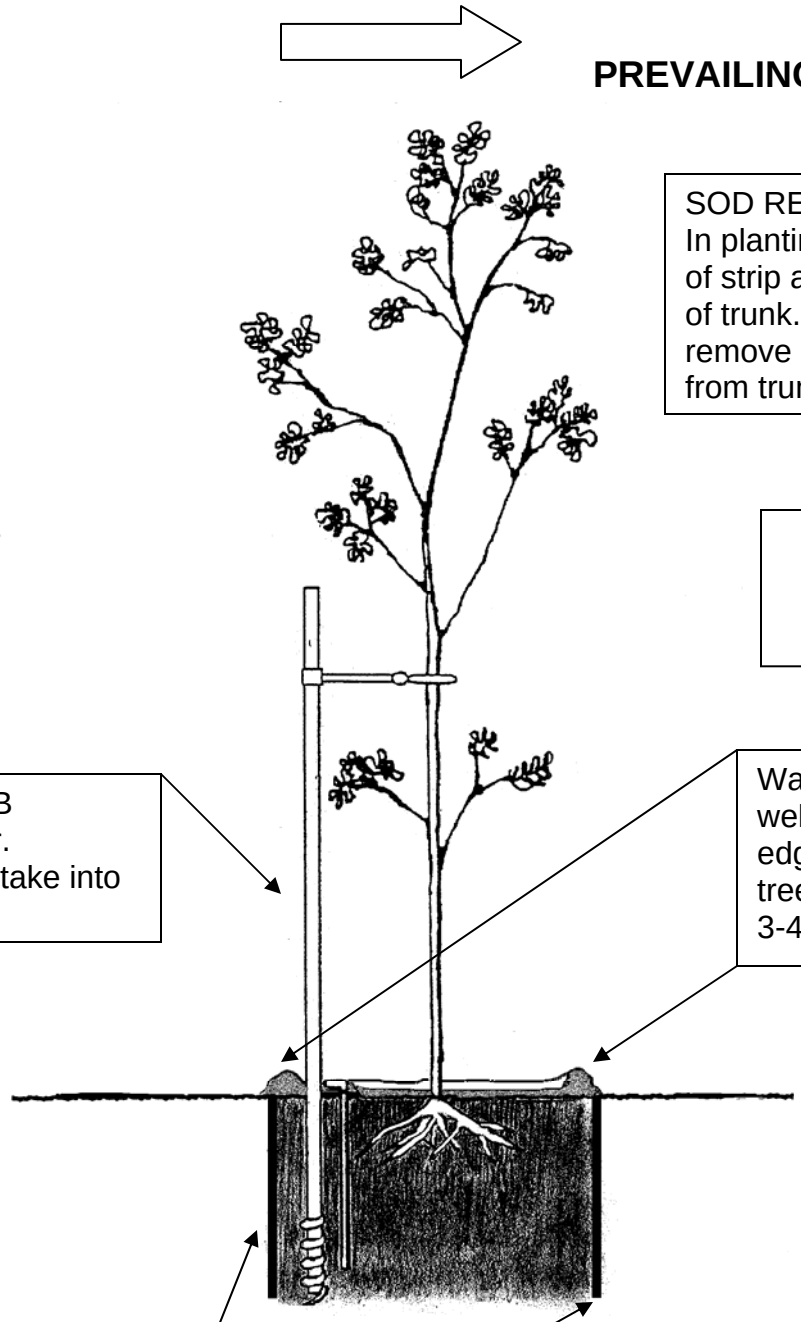

PREVAILING WIND

SOD REMOVAL
In planting strips remove width of strip and 2 ft. long each side of trunk. In landscape areas, remove a minimum of 18 inches from trunk.

REMOVE NURSERY STAKE!!!

Reddy Stake – Size B
9' long **x** ¾" diameter.
DO NOT place tree stake into nursery root ball.

Watering Basin-Build soil well for watering. Create edge of well at drip line of tree canopy (3-4" thick and 3-4" in high).

Two root barriers; 12" deep x 4' long x 1/16" thick. Smooth side parallel to curb and sidewalk at a maximum of 4" away.

Contact: CITY ARBORIST - 1404 Mabury Road, San Jose, CA 95133 **tel** (408) 277-2762 **fax** (408) 277-3621